


Time and Date Change for Comdial DXP, DXP Plus, FX, FXII and MP5000 Telephone Systems

From any phone, lift handset or press the “ITCM” key to get ‘Intercom Dial Tone”

Dial “*#746*” (programming code)
Phone Window will look similar to this.



For Time Set Programming, Dial “01”
Phone Window will look similar to this.

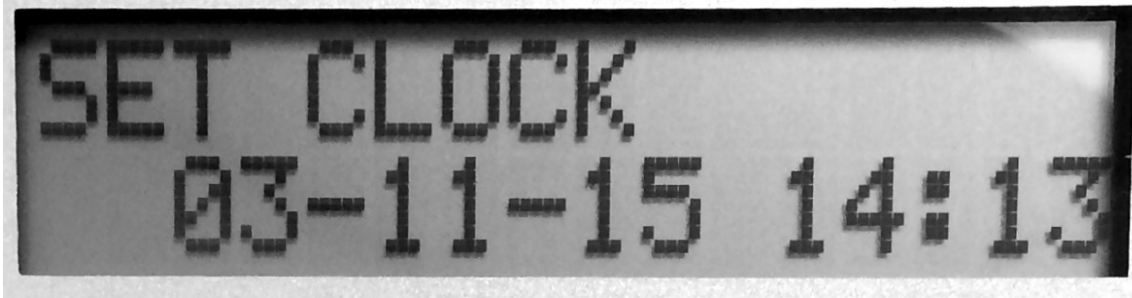

For Full Date/Time reprogramming Dial in
“DDMMYYhhmm” as one long number
Example: 1103151413 = 11-March-2015 at 2:13 PM

DD = Day 01-31 | MM=Month 01-12 | YY=Year 00-99
hh=Hour 00-23 (24 hour time, Midnight = 00, 1PM =13 etc.)
mm=Minute 00-59

Dial “#” to finish and hang up